


Fabrications, Safety, Energy & Lighting Solutions
UK & Ireland

Protected by



SafeDefence Safety Solutions KPSBarrier-H Product Data Sheet

SafeDefence Barrier Protection Systems

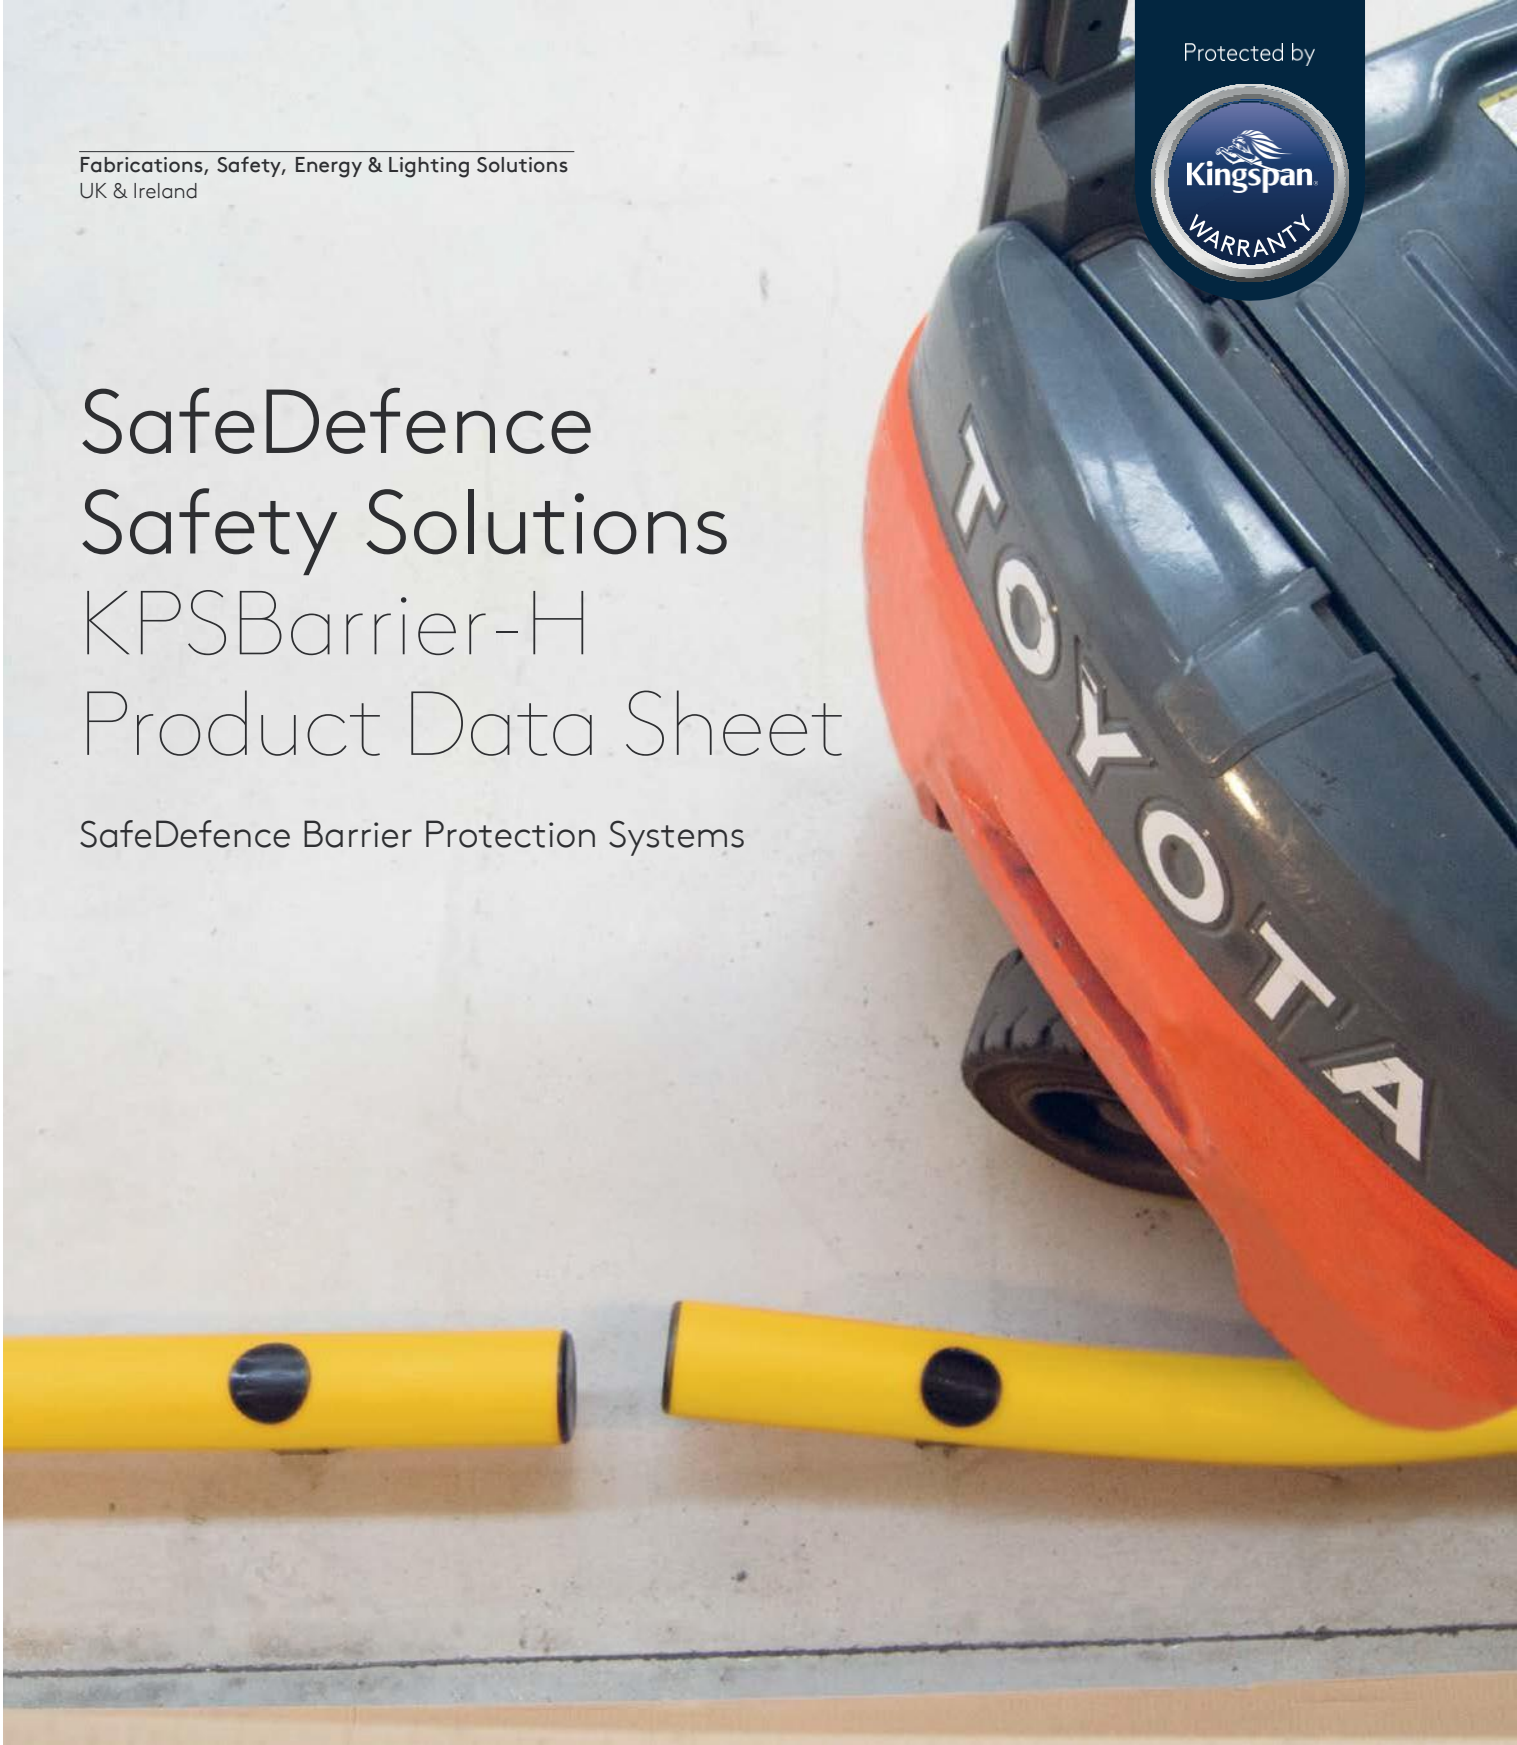

SafeDefence Barrier Protection Systems

SafeDefence Barrier Protection Systems consist of high-performance, high-density polyethylene around a metal support, tested and certified to provide protection to people and structures from the impact of machinery.

The range includes:

- KPSPost for the protection of walls, doors and corners;
- KPSTrim impact resistant plinth for protection at the base of building corners, columns and walls;
- KPSRail for the protection of people in areas of forklift and other mobile machinery;
- KPSBarrier-S, KPSBarrier-D and KPSBarrier-H to protect walls, columns and other objects at varying heights.

Testing

The University of Engineering and Architecture of Zaragoza, Spain, undertook a crash test with our Barrier Protection Systems to analyse the energy supported by our products and their impact resistance behaviour. Test results indicate that our Barrier Protection Systems products offer better impact protection than all others on the market due to their resistance and elasticity.

Materials

Barrier Protection products are manufactured from solid* high-density polyethylene designed to bend at the metal rod section with a force of over 10Tm, preventing floor and barrier breakage. Their simple construction and installation means they can be repaired or replaced immediately with minimum cost.

All products are located and installed independent of the elements to be protected, removing the risk of damage from impact transmission.

Hygienic and easy clean, low maintenance and carrying food-quality certification, these high-density polyethylene protective barrier systems are especially suitable for the agri-food industry.

* KPSBarrier-H is manufactured from polyethylene but has a hollow construction.





KPSBarrier-H

Technical Data

KPSBarrier-H offers excellent impact resistance combined with high flexibility.

KPSBarrier-H is manufactured from polyethylene and its hollow construction provides a robust yet highly flexible barrier system that is easy to assemble and replace.

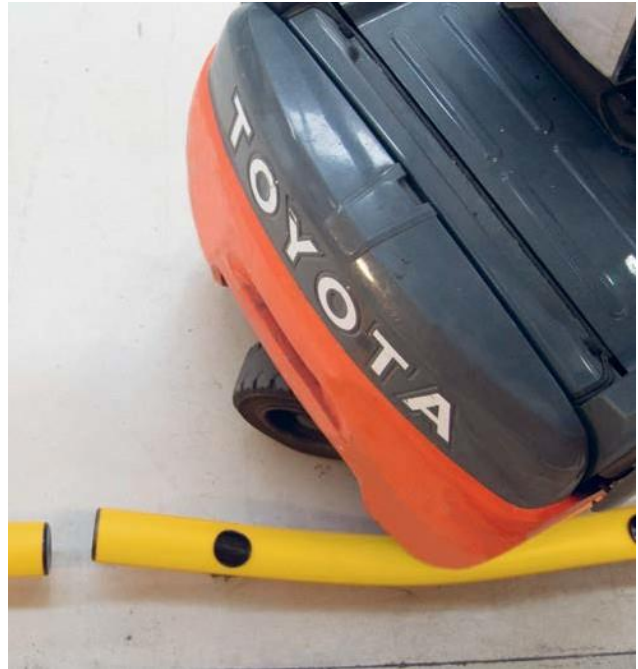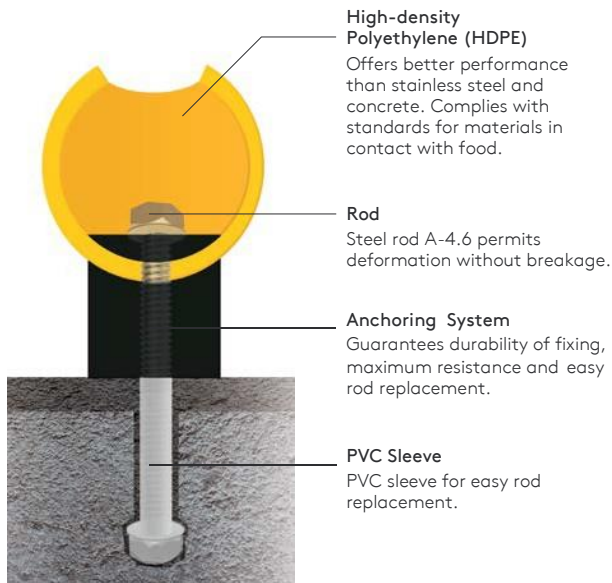

Technical Specification



Diameter	Dimensions (mm)			Drilling (mm)		
	Length	Number of Bases	Height	Ø Rod	Ø	Depth
110	500	2	175	14	36	150
110	1000	2	175	14	36	150
110	1500	3	175	14	36	150
110	2000	3	175	14	36	150
110	2500	4	175	14	36	150

United Kingdom

Kingspan Limited

Greenfield Business Park No.2, Greenfield,
Holywell, Flintshire, North Wales CH8 7GJ

T: +44 (0) 1352 716100

F: +44 (0) 1352 710161

www.kingspanpanels.co.uk

United Kingdom

Kingspan Limited

Sherburn, Malton

North Yorkshire

YO17 8PQ

T: +44 (0) 1944 712000

F: +44 (0) 1944 710830

www.kingspanpanels.co.uk

Ireland

Kingspan Limited

Carrickmacross Road

Kingscourt, Co. Cavan

A82 E897

T: +353 (0) 42 96 98500

F: +353 (0) 42 96 98572

info.ire@kingspanpanels.com

www.kingspanpanels.ie

For the product offering in other markets please contact your local sales representative or visit www.kingspanpanels.com

Care has been taken to ensure that the contents of this publication are accurate, but Kingspan Limited and its subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use or application of products or methods of working are for information only and Kingspan Limited and its subsidiaries accept no liability in respect thereof.

6/2019

