

SWING DOOR

one leaf



Applications:

Traffic door



FIREsafe™


Kingspan®
Innovation | Service | Support

Production details:



Door leaf

- ▶ 40 mm thick
- ▶ Galvanized steel covered with 25 µm PES coating in RAL 9002; protection foil
- ▶ Foamed-in-place polyurethane insulation of 40 kg/m³ density
- ▶ Window
- ▶ Bumpers



Door frame

- ▶ Mounted within the opening
- ▶ Made of acid-proof steel
- ▶ Not insulated
- ▶ One-sided, adapted to the assembly requirements



Hardware

- ▶ Provided by Fermod, French leader in hardware for refrigeration industry





Standard dimensions range

- ▶ Min 800 x 2000 mm
- ▶ Max 1200 x 2200 mm


Assembly

Main view

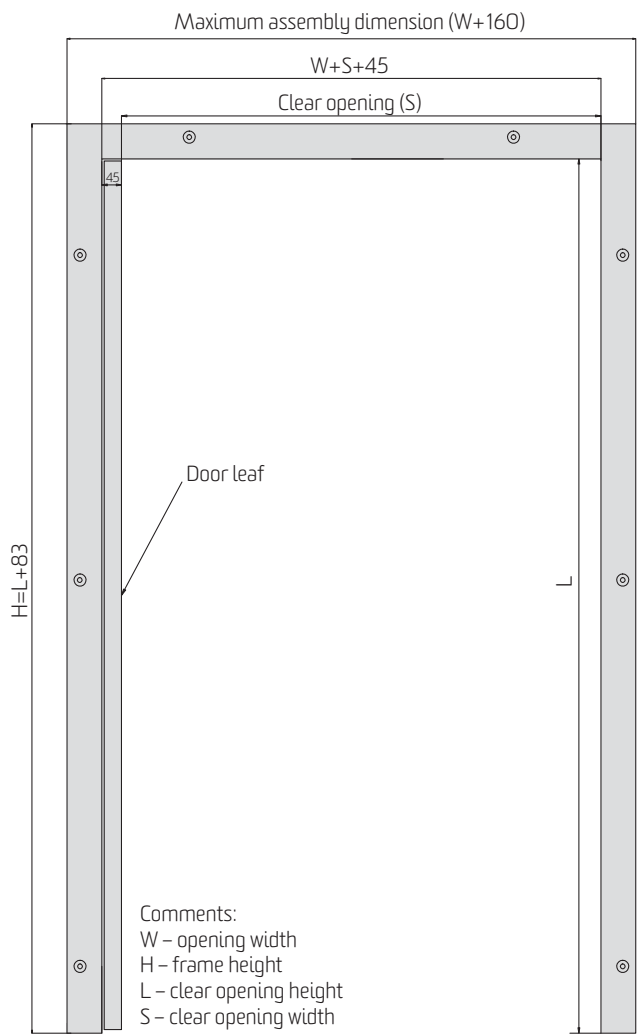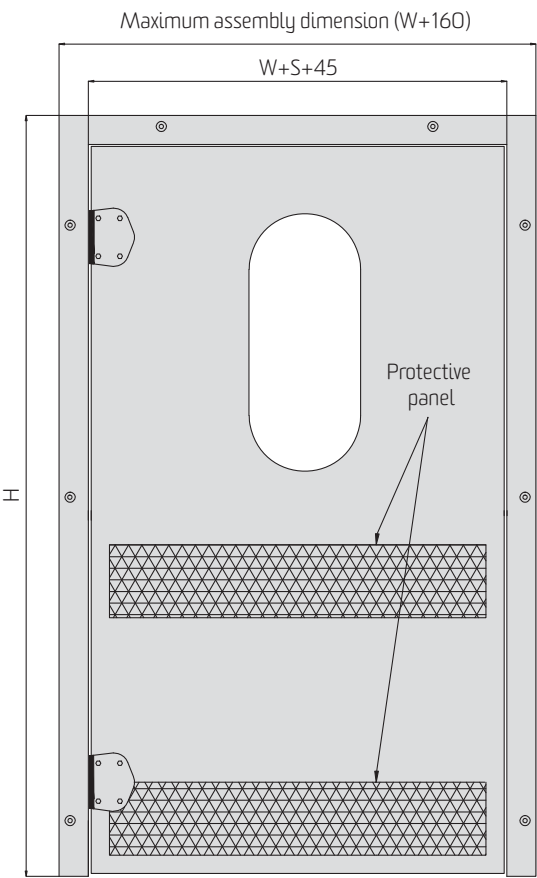


Clear opening

Assembly to insulated wall panel

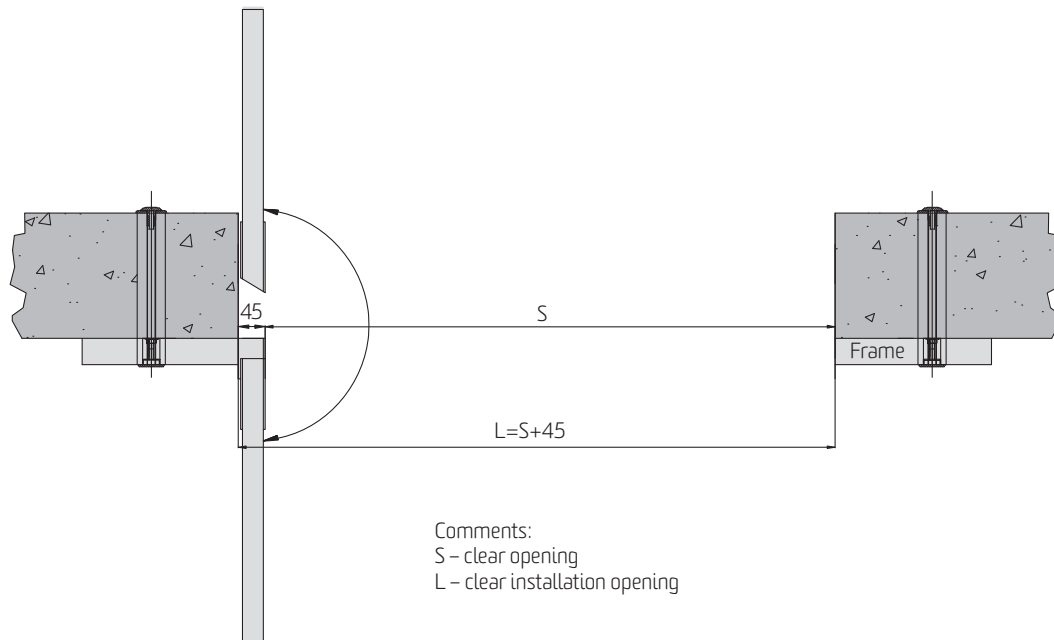

Traditional assembly (brickwork)

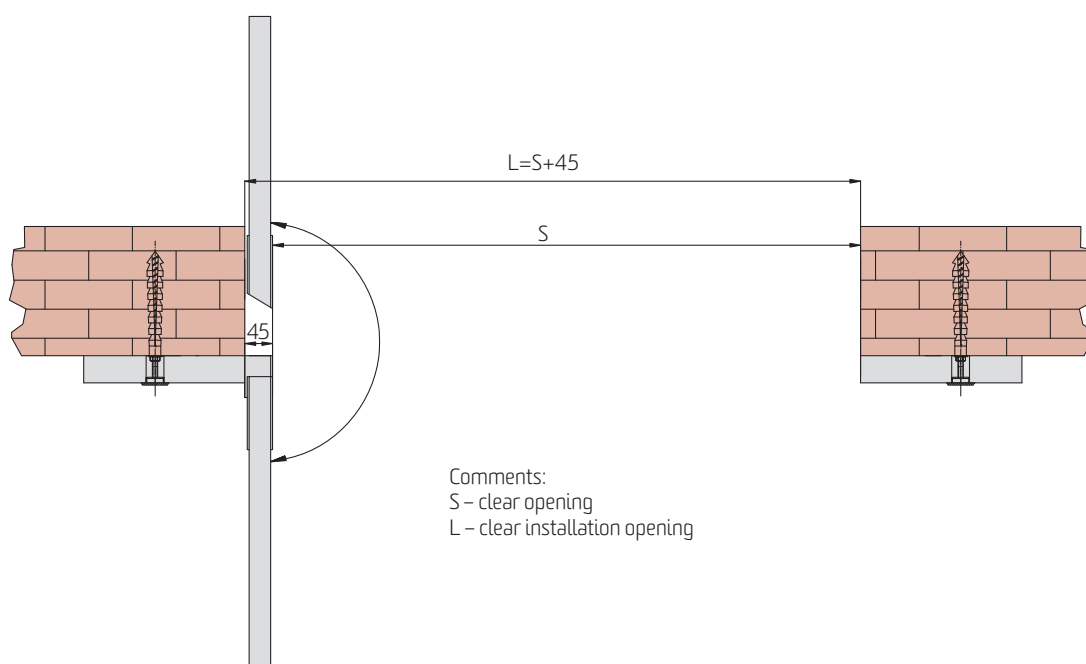



SWING DOOR

one leaf

Options:

- ▶ Other colours from the RAL collection
- ▶ Foodsafe – a 150 µm thick, chemically inert coating for interior and food processing applications
- ▶ Stainless steel, smooth
- ▶ Stainless steel, grained
- ▶ Other, non-standard dimensions



Kingspan Sp. z o.o.

20 Przemysłowa St.

27-300 Lipsko

Phone: +48 48 378 31 00

Fax: 48 48 378 13 30

info@kingspan.pl

www.kingspan.pl