


**ROOF CLADDING PROFILES
13.5/3 Sinusoidal · Aluminium**

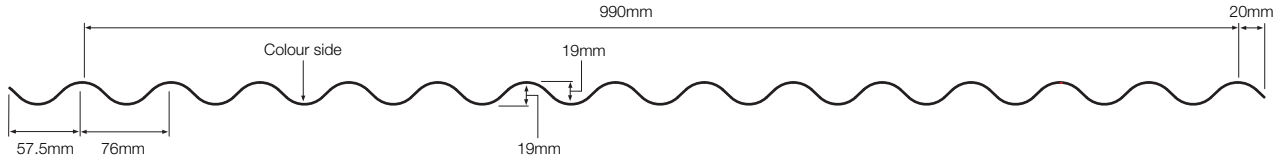

Dimension details

Cover width	990mm
Profile pitch	76mm
Profile depth	19mm
Overlap (left as shown above)	20mm from top dead centre
Underlap (right as shown above right)	57.5mm from bottom dead centre

Weight per linear metre

0.9mm 3.069 kgs

Tolerance on all dimensions as per BS EN 508 – 2.

13.5/3 Sinusoidal Aluminium · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
GRAVITY	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	0.94	0.71	0.54	0.43	0.34	0.28	0.23	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.06	0.05
Double Span	0.9mm	1.56	1.18	0.91	0.71	0.57	0.46	0.38	0.32	0.27	0.23	0.20	0.17	0.15	0.13	0.11	0.10	0.09	
Multi Span	0.9mm	1.56	1.18	0.91	0.71	0.57	0.46	0.38	0.32	0.27	0.23	0.20	0.17	0.15	0.13	0.11	0.10	0.09	

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
UPLIFT	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	0.94	0.71	0.54	0.43	0.34	0.28	0.23	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.06	0.05
Double Span	0.9mm	1.56	1.18	0.91	0.71	0.57	0.46	0.38	0.32	0.27	0.23	0.20	0.17	0.15	0.13	0.11	0.10	0.09	
Multi Span	0.9mm	1.56	1.18	0.91	0.71	0.57	0.46	0.38	0.32	0.27	0.23	0.20	0.17	0.15	0.13	0.11	0.10	0.09	

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC9).