


**WALL CLADDING PROFILES
MW5CS · Aluminium**

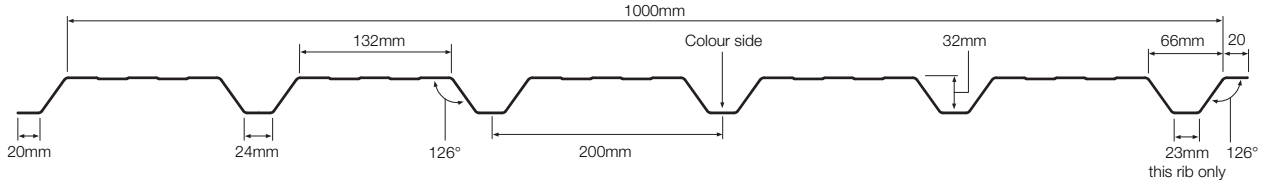

Dimension details

Cover width	1,000mm
Profile pitch	200mm
Profile depth	32mm
Crown width	132mm
Valley width	24mm
Rib width	66mm
Web	39mm
Overlap (left as shown above)	20mm
Underlap (right as shown above right)	20mm (minimum)

Weight per linear metre

0.9mm 3.039 kgs

Tolerance on all dimensions as per BS EN 508 – 2.

MW5CS Aluminium · Load/Span tables – working load UDL (kN/m²)

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
POSITIVE PRESSURE	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	3.31	2.74	2.16	1.70	1.36	1.10	0.91	0.76	0.64	0.54	0.47	0.40	0.35	0.31	0.27	0.24	0.21
	Double Span	0.9mm	2.56	2.22	1.95	1.72	1.52	1.36	1.22	1.10	1.00	0.91	0.78	0.67	0.58	0.51	0.45	0.40	0.35
	Multi Span	0.9mm	3.04	2.65	2.33	2.06	1.83	1.64	1.48	1.26	1.06	0.91	0.78	0.67	0.58	0.51	0.45	0.40	0.35

Load factor (working load to ultimate) = 1.5

		SPAN (m)																	
SUCTION	L/200	Thickness	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40	2.50	2.60
	Single Span	0.9mm	3.64	3.01	2.53	2.16	1.73	1.40	1.16	0.96	0.81	0.69	0.59	0.51	0.44	0.39	0.34	0.30	0.27
	Double Span	0.9mm	2.45	2.11	1.84	1.62	1.43	1.27	1.14	1.03	0.93	0.84	0.77	0.70	0.65	0.59	0.55	0.51	0.45
	Multi Span	0.9mm	2.91	2.53	2.21	1.95	1.73	1.54	1.39	1.25	1.13	1.03	0.94	0.85	0.74	0.65	0.57	0.51	0.45

Tables calculated by the SCI to EN 1993-1-3 (Eurocode EC9).