

Refresh Wall Brick/Block Existing with Horizontal MW5 Outer Profile			
Quattro Bracket Height	Insulation Thickness *	Insulation Value	Minimum U Value with Rails at 1.2M & Brackets at 1.5M Centres
120mm	160mm	0.040	0.36
140mm	180mm	0.040	0.31
160mm	200mm	0.040	0.27
180mm	220mm	0.040	0.24
200mm	240mm	0.040	0.22
220mm	260mm	0.040	0.20

* Insulation thickness is increased to allow for cleats/ tophats, typically based on Quattro bracket depth + 40mm.
 No allowance made for performance of block/brick wall in U value stated.

This draft drawing has been supplied by Euro Clad Ltd for the purpose of guidance free of charge. It is a suggested typical detail and as such should not be assumed suitable for any specific project or application. No responsibility is assumed for errors or misinterpretations resulting from the information contained in the drawing. Details are for illustration only and no liability is accepted. We reserve the right to change the details without notice. The drawing is copyright, it remains our property.

To be read in conjunction with Refresh guidance and specification documents

TITLE: Refresh Wall Brick/Block Existing with MW5 Horizontal Outer Profile

DWG NO: RW/BB/MW5/H

DRAWN: EP

CHECK: PCL


DATE: Aug 2017

SCALE: NTS





This draft drawing has been supplied by Euro Clad Ltd for the purpose of guidance free of charge. It is a suggested typical detail and as such should not be assumed suitable for any specific project or application. No responsibility is assumed for errors or misinterpretations resulting from the information contained in the drawing. Details are for illustration only and no liability is accepted. We reserve the right to change the details without notice. The drawing is copyright, it remains our property.

To be read in conjunction with Refresh guidance and specification documents

REFRESH WALL WITH HORIZONTAL MW5R PROFILE END DETAIL

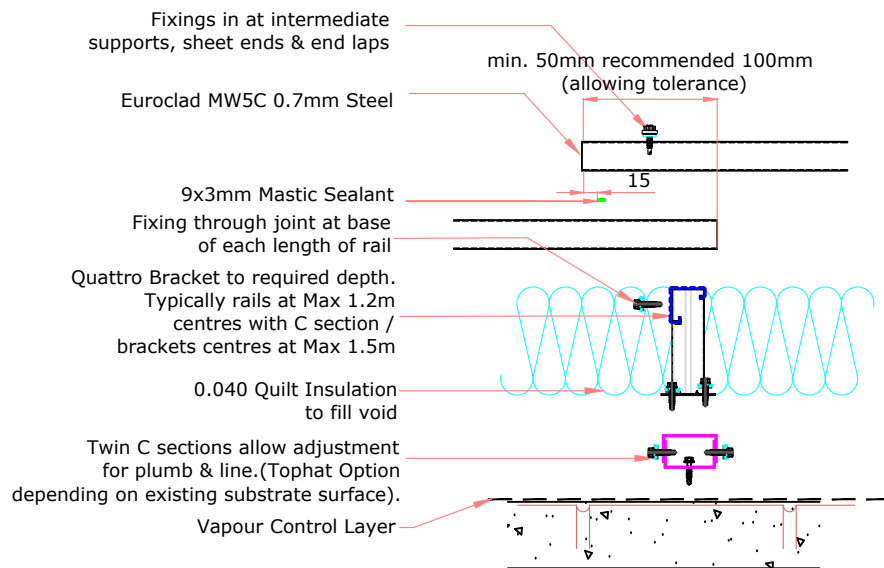

REFRESH WALL WITH HORIZONTAL MW5R PROFILE SIDE DETAIL

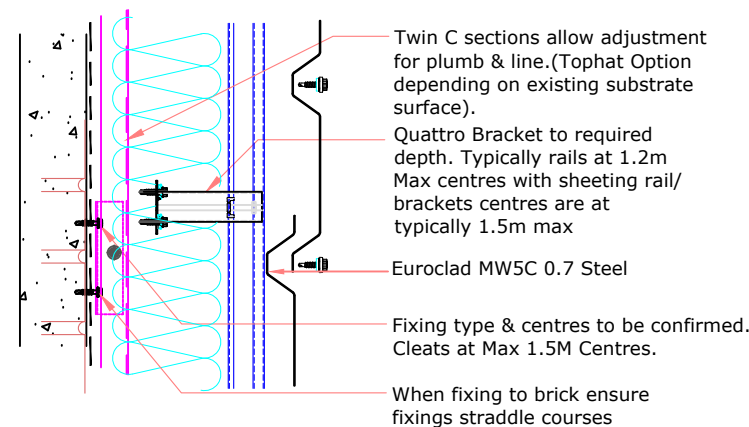

TITLE: Refresh Wall Brick/Block
Existing with MW5 Horizontal Outer
Profile

DWG NO: RW/BB/MW5/H

DRAWN: EP



CHECK: PCL

DATE: Aug 2017

SCALE: NTS

This draft drawing has been supplied by Euro Clad Ltd for the purpose of guidance free of charge. It is a suggested typical detail and as such should not be assumed suitable for any specific project or application. No responsibility is assumed for errors or misinterpretations resulting from the information contained in the drawing. Details are for illustration only and no liability is accepted. We reserve the right to change the details without notice. The drawing is copyright, it remains our property.

To be read in conjunction with Refresh guidance and specification documents

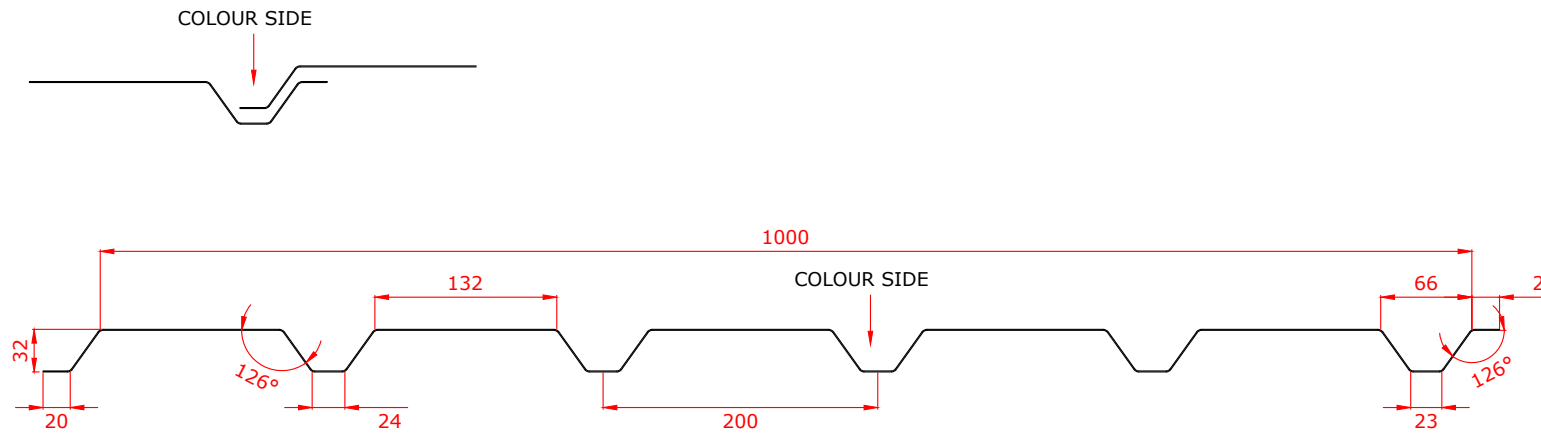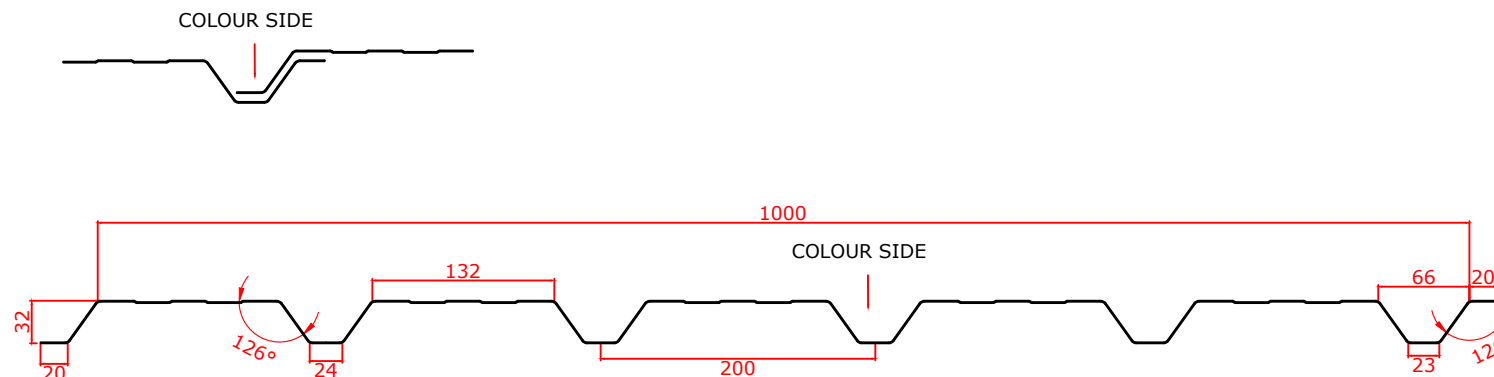EUROCLAD MW5C 0.7mm EXTERNAL SHEET**EUROCLAD MW5CS 0.7mm EXTERNAL SHEET**

TITLE: Refresh Wall Brick/Block Existing with MW5 Horizontal Outer Profile

DWG NO: RW/BB/MW5/H

DRAWN: EP


CHECK: PCL

DATE: Aug 2017


SCALE: NTS

This draft drawing has been supplied by Euro Clad Ltd for the purpose of guidance free of charge. It is a suggested typical detail and as such should not be assumed suitable for any specific project or application. No responsibility is assumed for errors or misinterpretations resulting from the information contained in the drawing. Details are for illustration only and no liability is accepted. We reserve the right to change the details without notice. The drawing is copyright, it remains our property.

To be read in conjunction with Refresh guidance and specification documents

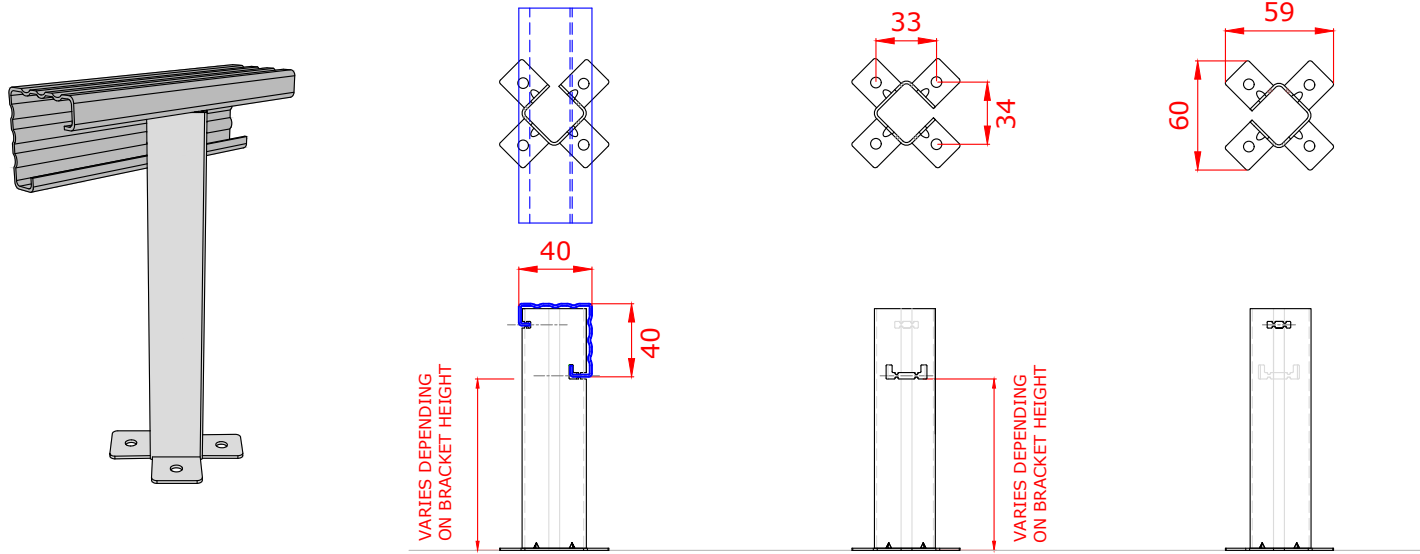

Brackets less than 260mm require 2 fixings diagonally opposite.
 Brackets 260mm or more require 4 fixings.

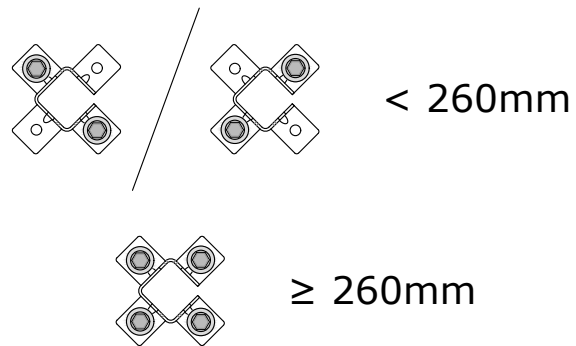

TITLE: Refresh Wall Brick/Block
Existing with MW5 Horizontal Outer
Profile

DWG NO: RW/BB/MW5/H

DRAWN: EP

CHECK: PCL

DATE: Aug 2017



SCALE: NTS

This draft drawing has been supplied by Euro Clad Ltd for the purpose of guidance free of charge. It is a suggested typical detail and as such should not be assumed suitable for any specific project or application. No responsibility is assumed for errors or misinterpretations resulting from the information contained in the drawing. Details are for illustration only and no liability is accepted. We reserve the right to change the details without notice. The drawing is copyright, it remains our property.


To be read in conjunction with Refresh guidance and specification documents

Galv 'C' Rails and cleats are preferable when wall surface is uneven and allows for adjustment.

***Cleat depth can be adjusted according to site requirements**

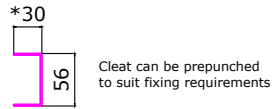


Material: 1.5mm Galv

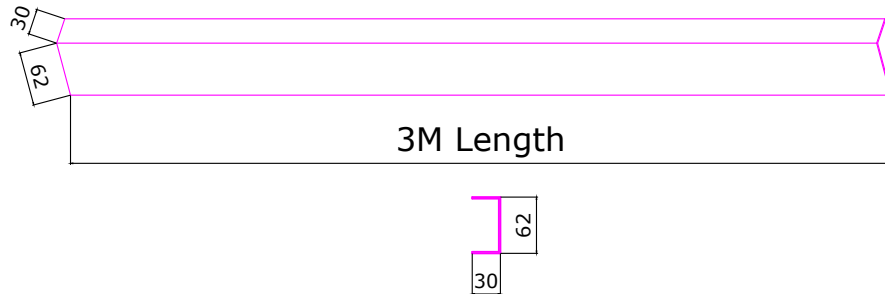

Tophats can be considered if wall surface is even with little variation.

***Tophat depth can be adjusted according to site requirements**



Material: 1.5mm Galv

